

Underlay System for Carpet and Carpet Tiles

superfloor®

Superfloor® Benefits:

- ◆ Sound reducing underlayment for carpet and carpet tiles
- ◆ Economical system is easy and fast to install, reducing installation time and labor costs
- ◆ Engineered with built-in self leveling properties that can eliminate costly substrate preparation
- ◆ Natural wood product with the added benefit of increased thermal insulation
- ◆ Moisture and mold resistant
- ◆ Extends carpet life
- ◆ Can be glue-down for commercial carpet or stretch over carpet tacks




ACOUSTIC PERFORMANCE


Building Construction	IIC	Carpet Type
5.5" Concrete slab (no ceiling)	Δ34	5/16" carpet loose laid
5.5" Concrete slab (no ceiling)	Δ37	5/16" carpet glued down

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.

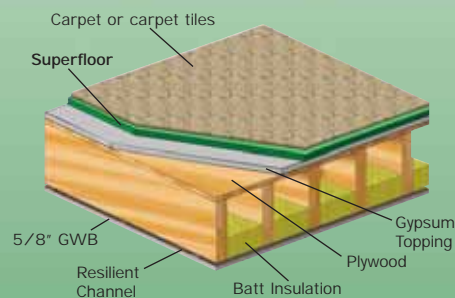

Typical Wood Construction

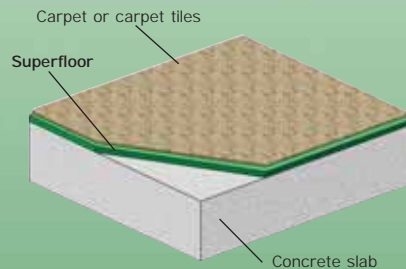

Typical Concrete Slab Construction

Product Specifications

- ◆ 1/4" or 7mm thick
- ◆ 23 1/4" x 33 7/8" boards
- ◆ 20 boards per pack
- ◆ 109 sq. ft. per pack
- ◆ 43 lbs. per pack
- ◆ 3052 sq. ft. per skid
- ◆ 28 packs per skid
- ◆ 1,204 lbs. per skid
- ◆ 100% natural wood product made from recycled material

Accessories

- ◆ None

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Superfloor installed will have no effect on the performance of the Superfloor. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.



50 H.P. Almgren Drive ◆ Agawam, MA 01001
Tel. 800.569.1294 ◆ Fax 413.789.4444
www.impactaunderlayment.com ◆ impacta@soundseal.com

